


## (1) Stic-it® Sticker Application: Review videos at www.getsticit.com/How It Works and figure below:

- Decide how you want to display Stic-it<sup>®</sup> stickers (driver's or passenger's side, front or back).
- Before removing backing paper, position the Stic-it® sticker about 1/8" from TRAILING CORNERS (7), holding the sticker on top of the panel to plan placement.
- Peel the backing paper off; carefully reposition the sticker as noted above; then press the sticker on beginning from the center; then use a credit card to press from the center toward the edges to drive larger pockets of air out. Peel the sticker off and start again if you messed up.

## (2) Mounting Stic-it® on Car: Review videos at www.getsticit.com/How It Works and figure below:

- Decide on which sides of the car to mount Stic-it® based on how you want to display sticker messages.
- Select the part of the window closest to level with the ground (usually the front part of the rear window). Lower the window a few inches and slide the CLIP (1) onto the window.
- Raise the window up all the way to secure the CLIP (1). LOCK WINDOW CONTROL SWITCH.
- Slide the PANEL (2) onto the POLE (3) until it clicks over POLE STOP (6) and ensure that the PANEL STOP (4) is behind the CLIP STOP (5). Ensure that the PANEL (2) rotates toward the back of the car.
- You're ready to go! Drive normally up to highway speed in normal wind conditions for quiet sailing.

WARNING — LOWERING THE WINDOWS WHILE VEHICLE IS IN MOTION MAY RESULT IN THE DEVICE FLYING OFF YOUR

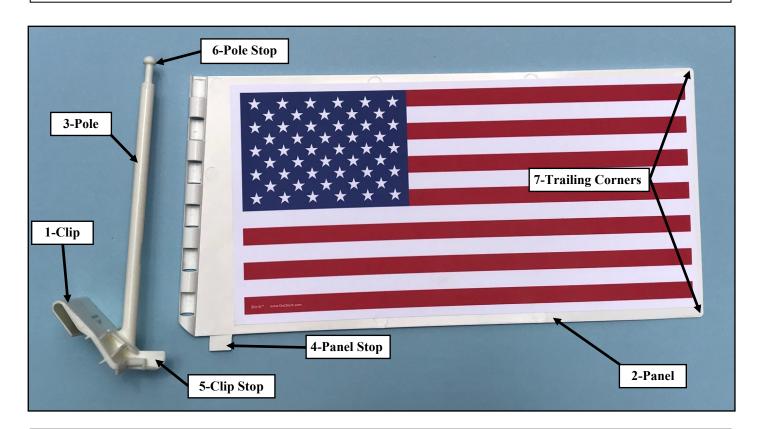

## (3) Stic-it® Removal and Remounting: Review video at www.getsticit.com/How It Works and figure above:

To remove the panel from the pole, press DOWN on the POLE STOP (6) with your thumb and slide the PANEL (2) up. OR, slide both CLIP (1) and PANEL (2) off window together.